


材料 Ma a TN120L

特点 F a

低功耗 L P L

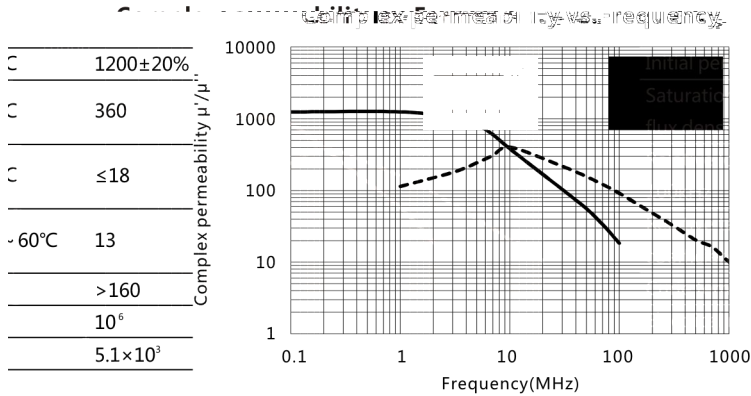




Initial permeability	μ_i	25%
Saturation magnetic flux density	Bs(mT) 1600A/m	25%
Relative loss factor 100kHz	$\tan\delta / \mu_i$ (×10 ⁻⁶)	25%
Relative temperature coefficient	$\alpha_{\mu i}$ (×10 ⁻⁶ /°C)	20%
Curie temperature	Tc(°C)	
Electrical resistivity	$\rho(\Omega \cdot m)$	
Density	d(kg/m ³)	

Test core : Toroid(mm)


OD : 12.7

ID : 7.9

H : 6.5

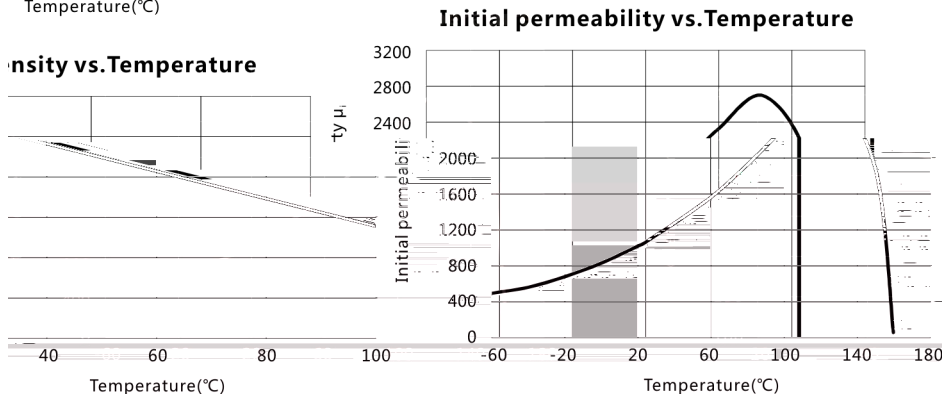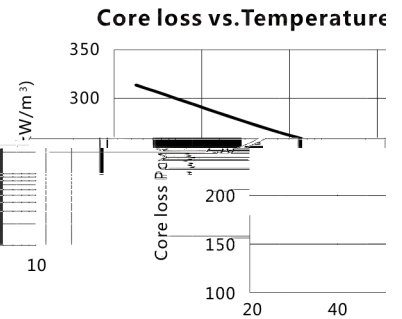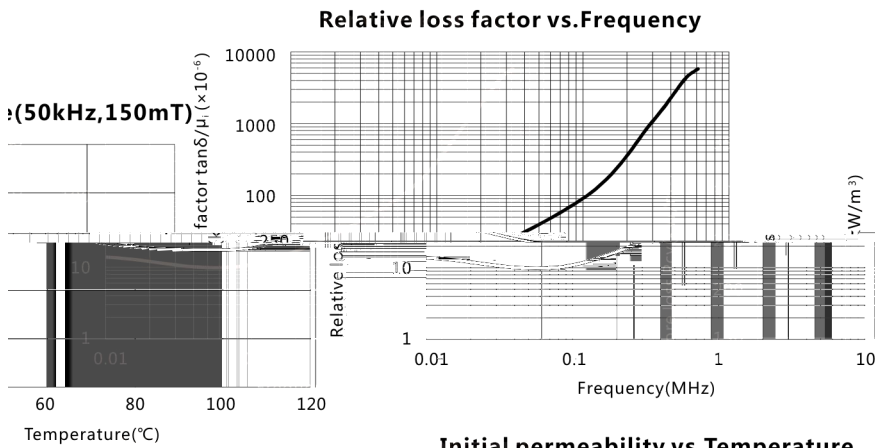

Flux density vs. Temperature



Flux density vs. Temperature

