


# 材料 Ma a TP4D

## 特点 F a

低磁心损耗，高饱和磁感应强度 L C L a H Sa a F D

损耗最低的温度点约在 °C T T a P L C L °C

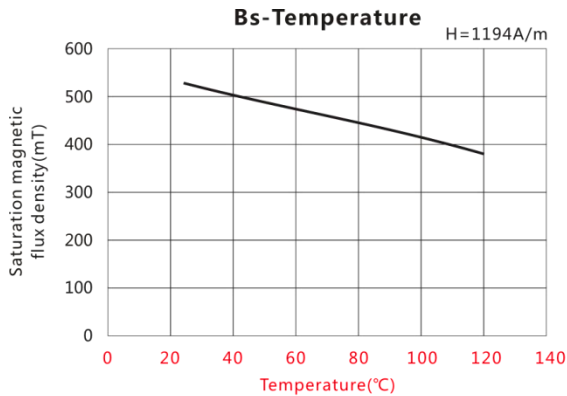




Initial permeability	$\mu_i$	25°C	2500±25%
Saturation magnetic flux density	Bs(mT)	25°C	520
		100°C	410
Remanence	Br(mT)	25°C	210
		100°C	60
Coercivity	Hc(A/m)	25°C	14
		100°C	7
Core loss	Pcv(kW/m³)	25°C	600
		60°C	400
		100°C	250
Curie temperature	Tc(°C)		≥220
Electrical resistivity	$\rho(\Omega\cdot m)$		4
Density	d(kg/m³)		4.8×10³

Test core : Toroid(mm)

OD : 25

ID : 15

H : 7.5

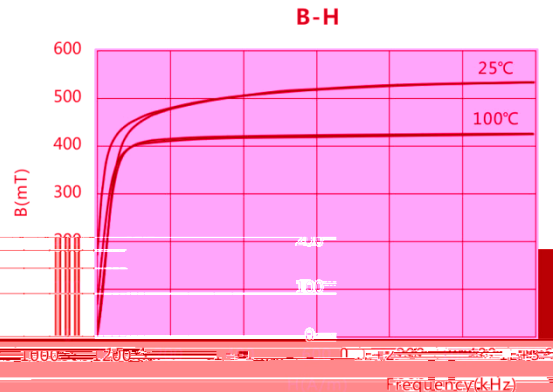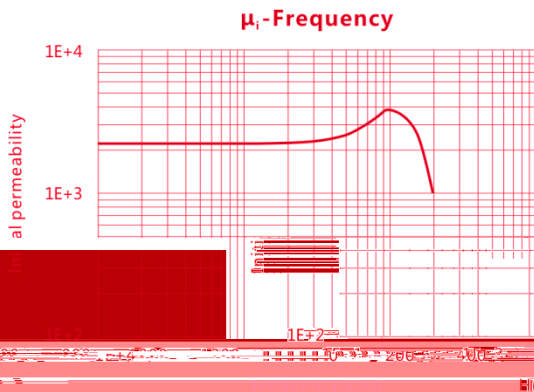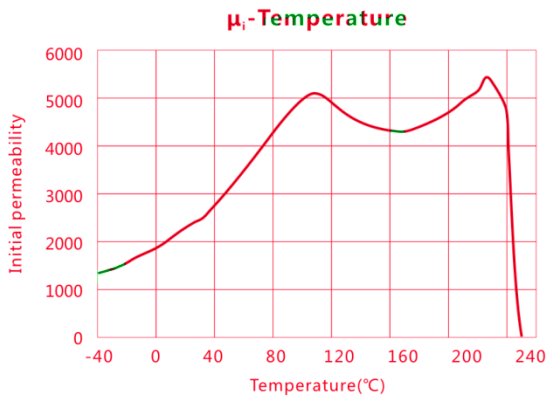

# 材料 Ma a TP4D

