
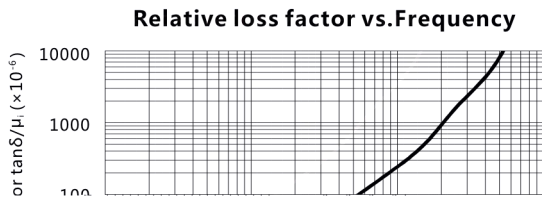


材料 Ma a TN130G

特点 F a

高磁导率 H I a P ab

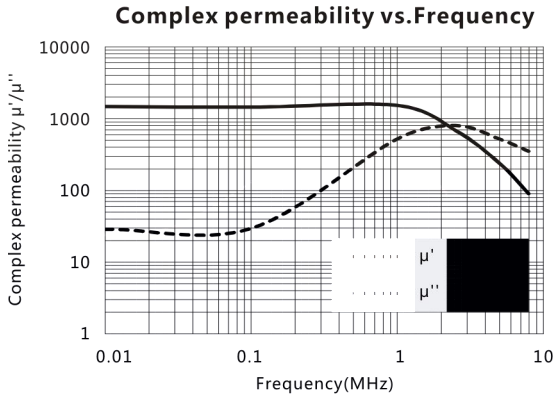

Initial permeability	μ_i	25°C	1300±20%
Saturation magnetic flux density	$B_s(\text{mT})$	25°C	240
Relative loss factor 10kHz	$\tan\delta/\mu_i$ ($\times 10^{-6}$)	25°C	≤15
Relative temperature coefficient	$\alpha_{\mu_{ir}}$ ($\times 10^{-6}/^\circ\text{C}$)	20 ~ 60°C	8
Curie temperature	$T_c(^\circ\text{C})$		>85
Electrical resistivity	$\rho(\Omega\cdot\text{m})$		10^6
Density	$d(\text{kg}/\text{m}^3)$		4.8×10^3

Test core : Toroid(mm)

OD : 12.7

ID : 7.9

H : 6.5